


# DATASHEET APPLICATION NOTE A087-EN04 - FLOW CONTROL IN PHOTOVOLTAIC (PV) SOLAR CELL PRODUCTION

## APPLICATION NOTE

### Flow control in solar cell production

**The manufacturing process for photovoltaic (PV) solar cells - cells that convert sunlight into electricity - consists of many steps like cleaning and etching of silicon wafers, or deposition of layers using physical or chemical vapour deposition techniques (PVD/CVD).**

Machines for the production of photovoltaic solar cells consist of a sequence of process chambers where the manufacturing steps take place under controlled conditions, with lock chambers in between. Each of these steps involve the supply of gaseous or liquid chemical compounds. For a company that builds two to three of such machines each week, Bronkhorst was asked to deliver mass flow devices for an accurate flow control.

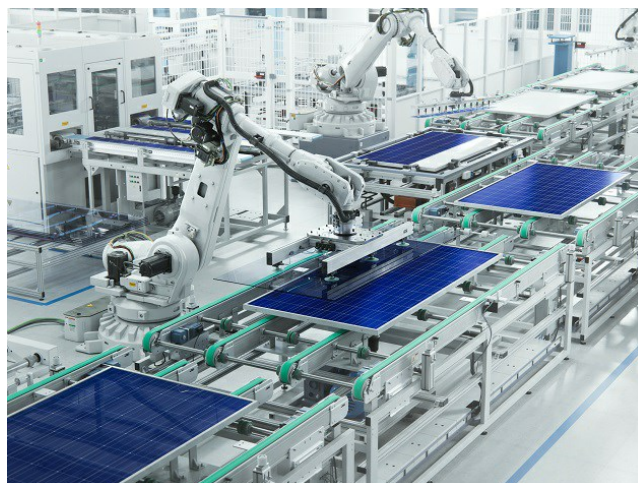

#### Application requirements

Each of the photovoltaic solar cell manufacturing machines consists of up to ten vacuum process chambers in total, utilising several dozens of mass flow controllers to supply gases, liquids and vapours. For this application, it is necessary that the flow devices supply exactly 500 or 1000 sccm - or any desired value - but it is essential that this will occur day after day. So repeatability is as important as accuracy.

#### Important topics

- Accurate supply of gases, liquids and vapours
- Repeatability
- Single mass flow controllers for multiple gases

#### Process solution

Bronkhorst delivered mass flow controllers for the accurate and reproducible supply of gases, vapours and liquids. Usually Bronkhorst EL-FLOW Select thermal mass flow controllers were used here for gas supply. In the case of liquids, most of them were evaporated to vapours by means of a CEM (Controlled Evaporation & Mixing) system in order to react at the surface of substrates in plasma enhanced chemical vapour deposition (PE-CVD) processes.

The CEM system consists of a (thermal or Coriolis) liquid flow controller (e.g. LIQUI-FLOW or mini CORI-FLOW), a mass flow controller for carrier gas (e.g. EL-FLOW Select) and a temperature controlled mixing and evaporation device.

The Bronkhorst flow devices are used here for applying layers on crystalline silicon wafers in traditional silicon-based solar cells, as well as for manufacturing thin layers as components of second generation amorphous-silicon-based thin-film solar cells on flexible substrates.



Let's dive somewhat deeper into the process with an example how to deposit a 'p-n junction' onto a flexible substrate, which is an essential part of the photovoltaic (PV) solar cell to convert sunlight into electrons. Two silicon layers with different dopants have to be applied on top of each other in separate process chambers. In this case, the process medium is silane ( $\text{SiH}_4$ ) and hydrogen ( $\text{H}_2$ ) with a trace gas, which is phosphine ( $\text{PH}_3$ ) for the n-doped layer and diborane ( $\text{B}_2\text{H}_6$ ) for the p-doped layer. To clean the vacuum process chambers between the deposition steps using a plasma, gaseous  $\text{NF}_3$  is added.

A feature of the EL-FLOW Select thermal mass flow devices is that they can be provided with several (~5) calibration curves for different gases, which has the advantage that a relative low number of these mass flow controllers can be used - each for gases that are somewhat comparable. This efficient use of devices leads to cost reduction.

These devices are also suitable to be applied in adjacent application areas that use vacuum technology, such as the semiconductor industry, and to manufacture light emitting diodes (LEDs) for displays and lighting.

## Recommended Products



EL-FLOW SELECT F-201CV

Min. flow 0,16...8 mln/min  
Max. flow 0,5...25 lln/min  
Pressure rating 64 bar  
Compact design  
High accuracy and repeatability



CEM EVAPORATOR W-202A

Max. 120 g/h liquid;  
Max. 10 lln/min gas  
Pressure rating 100 bar  
Very stable vapor flow  
Flexible gas/liquid ratio



LIQUI-FLOW™ L13

Min. flow 0,25 ... 5 g/h  
Max. flow 5 ... 100 g/h  
Pressure rating 100 bar  
Compact, IP40 design  
Analog, RS232 or fieldbus I/O



MINI CORI-FLOW™ M12

Flow range 0...200 g/h  
Pressure rating 200 bar  
Independent of fluid properties  
High accuracy, fast response



BRONKHORST (UK) LTD

1 Kings Court

Willie Snaith Road

Newmarket Suffolk CB8 7TG

Tel. +44 1223 833222

[sales@bronkhorst.co.uk](mailto:sales@bronkhorst.co.uk)

